


Supply Voltage (Vs): 7-30 Vdc @ 15 mA
Pulse Out (Vo): 0-Vs, 0-5V, 0-10V, OC (NPN/PNP)
Freq. Range: 0.5 Hz - 5 kHz
Air Gap: 0.16" (4mm) Max., Depending on target mass and velocity.
Temp. Ranges: **2TE**: -40° to 220° F (-40° to 120° C)
3TE: -40° to 290° F (-40° to 145° C)



5/8 Thread Size: 5/8-18, M16x1.5
M16 Length (L): 2.5 - 10" (64-250mm)






0096
0096M (M16)

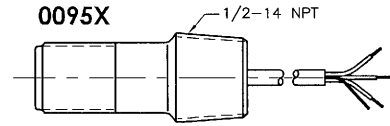

0095
0095M (M16)

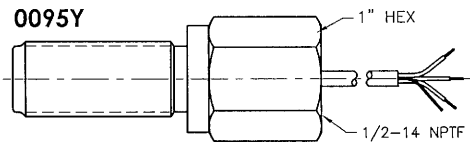


11/16 Thread Size: 11/16-24
Length (L): 2.1-3.5" (54-90mm)

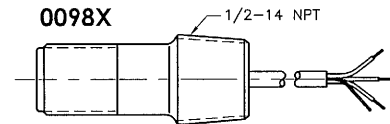


3/4 Thread Size: 3/4-16, 3/4-20, M18x1.5
M18 Length (L): 2.1-10" (54-250mm)
Temp. Ranges: 3T, 4HT, OR 5HT

0099
0099M (M12)



0099L
0099LM

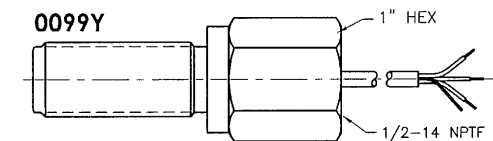

Detailed spec-sheets are available for each sensor listed, please contact Spectec for more information.