

PA-20


Supply Voltage (Vs): 5-30 Vdc Std.
Input Current: 15 mA Std.
Pulse Out (Vo): 1-10 Vpp Std.
Input Sensitivity: 30 mV, 12 mV, 5 mV
Temp. Ranges: **Standard.**; -40 to 160 F (-40 to 80 C), **In Line and Ultra Compact**; -40 to 248 F (-40 to 120 C)
Freq. Range: Up to 100kHz depending on target mass and air gap.

MICROPOWER versions are available for ultra low current draw, ideal for battery applications

Supply Voltage (Vs): 2 - 6 Vdc
Input Current: 0.06 mA
Input Sensitivity: 12 - 40 mV
Freq. Range: 1 Hz - 30 kHz


4021

PULSE AMPLIFIER
MULTI OUTPUT, NOISE CANCELING
STANDARD AND/OR OPTO-ISOLATED
FOR GUAL-16 TYPE EXPL. PR. ENCL.

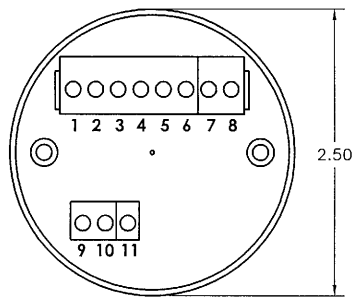


4022

PULSE AMPLIFIER
W/ OPTIONAL OUTPUT SELECT
FOR ELBY EXPL. PR. ENCL.




4023

PULSE AMPLIFIER
FOR Y1 EXPL. PR. ENCL.




4024

IN-LINE PULSE AMPLIFIER
WITH MS CONNECTOR




4024M




4024H

ULTRA COMPACT

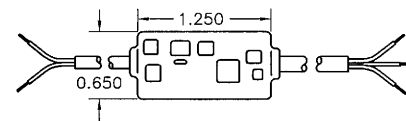


4026

FTC/FTV CONVERTER
FTC: 4-20, 10-50mA,
FTV: 0-5, 0-10 V
FOR Y3 EXPL. PR. ENCL.




4027

FTC CONVERTER
4-20 mA FOR
ELBY EXPL. PR. ENCL.




4028

FTV CONVERTER
0-5 V OR 0-10 V FOR
ELBY EXPL. PR. ENCL.




4029

DIGITAL OPTO-ISOLATED
CURRENT LOOP
FOR ELBY EXPL. PR. ENCL.



4033

DIRECTIONAL MAG PREAMP
PROVIDES DIRECTIONAL DATA
FROM TWO MAG PICKUPS
FOR Y3 EXPL. PR. ENCL.



Detailed spec-sheets are available for each sensor listed, please contact Spectec for more information.