



Inductance/Resistance Options: **RF4**; 4.00 Ohm, 0.36 mH
RF10; 12.00 Ohm, 1.00 mH\
Temp. Ranges: **3T**; -150 to 330 F (-101 to 165 C)
4HT; -250 to 400 F (-157 to 204 C)
5HT; -450 to 450 F (-270 to 232 C)

NOTE: Must be used with PA-10


3/8 Thread Size: 3/8-24, M10x1.25
M10 Length (L): .5 - 5" (13-130mm)

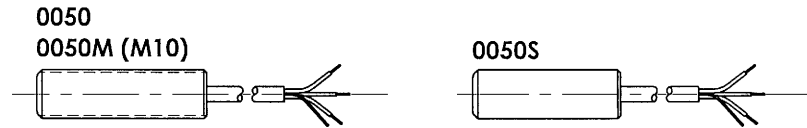


1/2 Thread Size: 1/2-20
Length (L): .5 - 5" (13-130mm)




5/8 Thread Size: 5/8-18, M16x1.5
M16 Length (L): .5 - 10" (13-250mm)

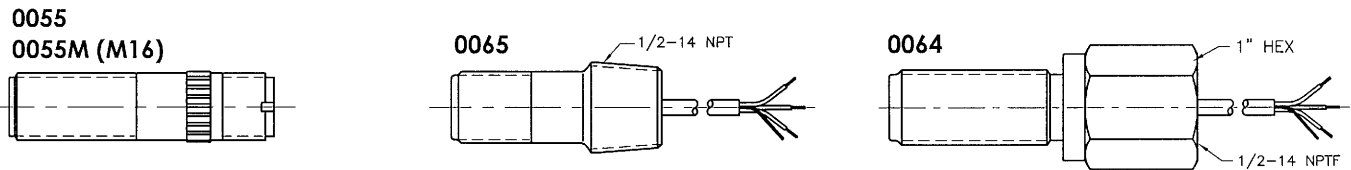

1 1/16 Thread Size: 1 1/16-24
Length (L): .5 - 3.5" (13-90mm)

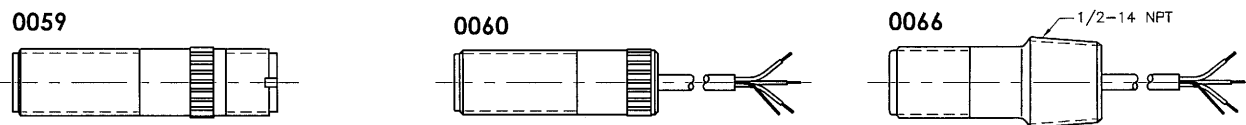

3/4 Thread Size: 3/4-16, 3/4-20, M18x1.5
M18 Length (L): .5 - 10" (13-250mm)



Detailed spec-sheets are available for each sensor listed, please contact Spectec for more information.